


GEOMETRY COMPLETE MTB BIKES

	TT	eTT	CS	ST	Reach	Stack	WB	BB drop	HT angle	ST angle
ROOTS RED DEVIL (L)	558	590	430	410	430	592	1200	-5	64°	75°
ROOTS RED DEVIL (S)	520	560	430	410	400	592	1170	-5	64°	75°
ROOTS GREY ANGEL (L)	558	590	430	410	430	592	1200	-5	64°	75°
ROOTS GREY ANGEL (S)	520	560	430	410	400	592	1170	-5	64°	75°
WISH ENDURO (L)	565	582	419	431	440	584	1180	-4	65°	76°
WISH ENDURO (S)	535	552	419	406	410	584	1150	-4	65°	76°
WISH BIKEPARK (L)	565	582	419	431	440	584	1180	-4	65°	76°
WISH BIKEPARK (S)	535	552	419	406	410	584	1150	-4	65°	76°
PRIMAL PRO RED DEVIL (L)	591	625	425	477	415	610	1125	30	67°	71°
PRIMAL PRO RED DEVIL (M)	573	604	425	452	390	610	1105	30	67°	71°
PRIMAL PRO RED DEVIL (S)	559	585	425	426	370	610	1085	30	67°	71°
PRIMAL BASIC PETROL (L)	591	620	425	477	422	603	1125	38	68°	72°
PRIMAL BASIC PETROL (M)	573	600	425	452	402	603	1105	38	68°	72°
PRIMAL BASIC PETROL (S)	559	580	425	426	382	603	1085	38	68°	72°
TWO6PLAYER RED DEVIL	574	-	385	310	414	564	1070	20	69°	-
TWO6PLAYER MIAMI VICE	574	-	385	310	414	564	1070	20	69°	-
QUINNIE RED DEVIL	574	-	383	300	402	543	1050	0	68,5°	-
GAMER26 BLACK	557	-	385	354	403	579	1036	25	70°	-
GAMER26 BLUE	557	-	385	354	403	579	1036	25	70°	-
GAMER24 RED	540	-	370	325	388	562	1006	8	70°	-

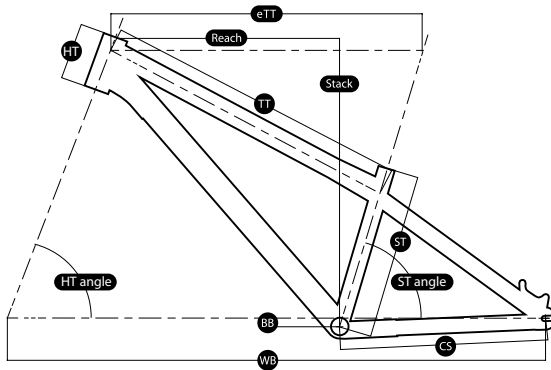

- Reach** - horizontal distance from BB center to HT center
- Stack** - vertical distance from BB center to HT top
- ST** - seat tube length (BB center to ST top)
- TT** - top tube length (actual)
- eTT** - top tube length (effective)
- CS** - chain stay length
- HT** - head tube length
- HT angle** - head tube angle
- eST angle** - seat tube angle (effective)
- BB drop** - bottom bracket height (BB center to WB)
- WB** - wheel base
- Standover** - vertical distance from the ground to TT top (in the middle of the TT length with wheels assembled)